




CURB AND GUTTER

LAYDOWN/RIBBON CURB OR NO CURB AND GUTTER

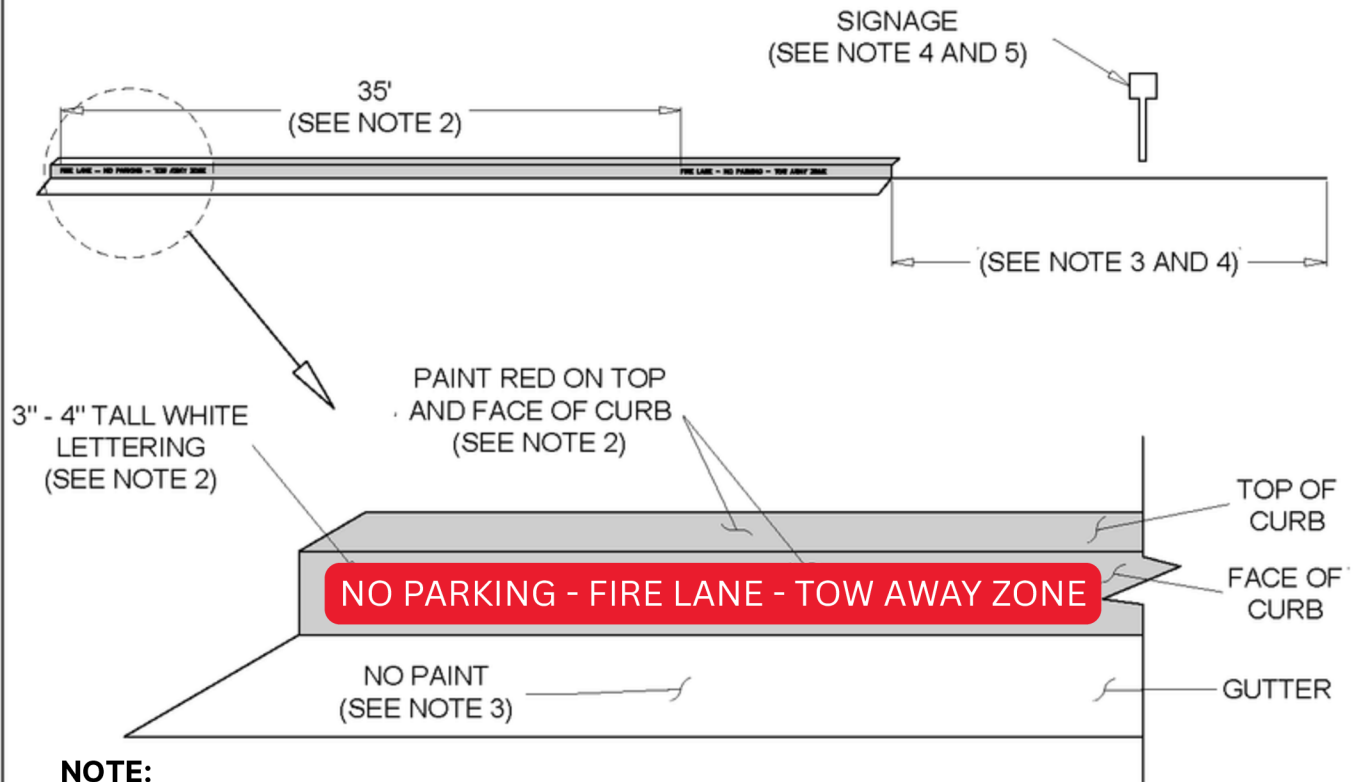

NOTE:

1. ALL CURBS TOUCHING THE FIRE LANE AS SHOWN ON THE STRIPING PLAN SHALL BE STRIPED AS SHOWN ON THIS DETAIL.
2. TOP AND FACE OF CURB PAINTED RED WITH 3-4" TALL WHITE LETTERS ON THE FACE OF CURB "NO PARKING - FIRE LANE - TOW AWAY ZONE" EVERY 50 FEET.
3. FIRE LANE MARKINGS SHALL BE ON BOTH SIDES OF THE FIRE LANES. WHERE NO CURBING AND GUTTERING EXISTS, FIRE LANES SHALL BE MARKED WITH COMPLIANT SIGNAGE PER D103.6 AND SECTION 503, OR THE FIRE LANE MARKINGS SHALL TRANSITION TO THE FLAT SURFACE OF THE PAVEMENT.
4. SIGNAGE MAY BE REQUIRED IN AREAS WHERE THE CURB FOR A FIRE LANE DOES NOT EXIST.
5. WHERE REQUIRED, SIGNS SHALL BE SPACED NO MORE THAN 50' APART AND COMPLY WITH SECTION D103.6 OF THE ADOPTED FIRE CODE.

WHITE REFLECTIVE
BACKGROUND
RED LETTERING
AND BORDER



SIGNAGE
SEE NOTE 5

FIRE LANE STRIPING

Travis County ESD 5

THE ARCHITECT/ENGINEER ASSUMES
RESPONSIBILITY FOR APPROPRIATE
USE OF THIS STANDARD

10-1-2025